



ENVIRONMENTAL PRODUCT DECLARATION
in accordance with ISO 14025 and EN 15804

Product	<p>etalbond®-Light</p> <p>Aluminium Composite panel</p> 
Declaration holder	 <p>ELVAL COLOUR Power to imagine</p>
Publisher and programme holder	<p>European Aluminium</p>  <p>EUROPEAN ALUMINIUM</p>
Declaration number	<p>EPD EA 2015 – ELVAL COLOUR 8</p>
Issue date	<p>1 June 2015</p>
Valid until	<p>30 May 2020</p>
weblink	<p>http://www.european-aluminium.eu/updated-epd-programme-2/</p>

Declaration holder:  ELVAL COLOUR <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------

1. General information

Owner of the declaration	ELVAL COLOUR 3 RD Km Inofyta Peripheral Rd., 32011 St. Thomas, Viotia, Greece						
Programme holder	European Aluminium (EA) AISBL (previously European Aluminium Association) Avenue de Broqueville, 12 B - 1150 Brussels Belgium  Dr Gerd Götz, Director General						
PCR used for the verification	EAA Product Category Rules (PCR) for Aluminium Building Products – version of 30 January 2013						
Verification	<table border="1" style="width: 100%;"> <tr> <td colspan="2">EN15804 serves as core PCR completed by EAA PCR</td> </tr> <tr> <td colspan="2">Verification of the EPD by an independent third party in accordance with SO 14025</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/> Internally</td> <td style="text-align: center;"><input checked="" type="checkbox"/> Externally</td> </tr> </table>	EN15804 serves as core PCR completed by EAA PCR		Verification of the EPD by an independent third party in accordance with SO 14025		<input type="checkbox"/> Internally	<input checked="" type="checkbox"/> Externally
EN15804 serves as core PCR completed by EAA PCR							
Verification of the EPD by an independent third party in accordance with SO 14025							
<input type="checkbox"/> Internally	<input checked="" type="checkbox"/> Externally						
Verifier	Carl-Otto Nevén NEVÉN Miljökonsult/Environmental Cons.  _____ Carl-Otto Neven						
Declaration number	EPD EA 2015 – ELVAL COLOUR 8						
Functional Unit	1 m ² of etalbond® Light Aluminium composite panel						
Product group covered and applicability	This EPD covers aluminium composite panels of 2, 3; 4 and 6 mm thickness composed of two external aluminium sheets of total thickness of 0,3 mm coated with polyester coating and with an inner material composed of polyethylene core. This EPD has been calculated from a modelling tool developed by thinkstep via an i-report in GaBi 6. The data and parameters used in the tool have been calculated on basis of production figures collected for the years 2011 or 2012 among four aluminium coil coaters and three composite panels' producers, including ELVAL COLOUR. The results generated by the collective tool can be considered as a good proxy to model composite panels produced by ELVAL COLOUR.						
Liability	The owner of the declaration is liable for the underlying manufacturing information and evidence; European Aluminium, i.e. the programme holder, is not liable in this respect.						

2. Product

2.1. Product description and application

This Environmental Product Declaration (EPD) is for business to business communication. The EPD refers to “etalbond®-light” composite panels which are composed of two external aluminium layers of total thickness of 0,30 mm coil-coated sheets and an inner material made of polyethylene, virgin or recycled. This EPD covers etalbond light of 2, 3, 4 and 6 mm thickness. The etalbond®-light products are delivered as panels with a maximum of 2 m width and up to 8 m length. Etalbond light® composite panels are semi-finished products which are usually further processed (e.g. by cutting, folding or

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

machining operations) to be converted into a final product to be used for signage and decorative purposes outdoor or indoor, corporate identity for gas and toll stations, shops, exhibition stands, shop-fitting, decorative walls, wall partitions, machine cladding, elevator/ stair and facings and at any decorative project.

This EPD provide LCA results for the following etalbond light® composite panels:

- Four composite panel thicknesses: 2, 3, 4 and 6 mm
- One type of coating: Polyester – 22 ±3 µm

2.2. Technical data

Main technical data are reported in the next table

PANEL THICKNESS:		2mm	3mm	4mm	6mm
Aluminium sheet thickness	mm	0.30			
Panel Weight	[Kg/m ²]	2.90	3.80	4.80	6.60
PANEL TOLERANCES					
Panel thickness	mm	±0.2			
Panel width	mm	-0.00 / +4.00			
Panel length	mm	≤ 4000 mm : -0.0 / +4 4001 -6000 mm: -0.0 / +6 6001- 8000 mm: -0.0 / +10			
Diagonal difference	mm	3.00 mm			
TECHNICAL PROPERTIES					
Alloy/Temper of Aluminium cover sheet		Composition :			
EN AW- 3105/H44		Cr 0.2% max, Cu 0.3% max, Fe 0.7% max, Mg 0.2% - 0.8%, Mn 0.3% - 0.8%, Si 0.6% max, Ti 0.1% max, Zn 0.4% max, remainder total 0.15% max			
Or EN AW 4116 /H44		Cr 0.05% max, Cu 0.4% max, Fe 0.7% max, Mg 0.4% max, Mn 0.5% - 1.0%, Si 1.0-1.8%, Ti 0.1% max, Zn 0.2%-1.0%, remainder total 0.15% max			
Modulus of Elasticity	E [N/mm ²]	70000			
Tensile strength of Al. cover sheets	Rm [N/mm ²]	150-200			
0.2% Proof stress	Rp_{0.2} [N/mm ²]	120			
Elongation	%	A ₅₀ ≥ 3%			
Linear Thermal Expansion		2.4 mm/m for Temperature difference of 100° C			
CORE:					
Polyethylene					

Declaration holder:  Power to imagine	Programme holder:  EUROPEAN ALUMINIUM
------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

SURFACE PREPARATION and PAINT CHARACTERISTICS	
Lacquering Upper Surface/ Lower Surface <ul style="list-style-type: none"> • Gloss • Pencil Hardness • Paint Thickness 	Coil Coating, <u>Polyester/Modified Polyester suitable for digital printing - System</u> Semi gloss Target 35 % , Tolerances according to EN 1396 High gloss Target >80% Tolerances according to EN 1396 Min H Target 22 µm, Tolerances according to EN 1396

2.3. Relevant Standards for market Applications

Most relevant standards for applications of aluminium composite panel products in buildings are EN 485-4, EN 573-3, EN 1396, Din 4102, NF P92-512, BS 476 Part6 and part 7, EN 13501-1.

2.4. Delivery status

The material is supplied semi-finished in customised dimensions and with customised surface coating for further processing.

2.5. Metal and sheet production (background processes)

The most significant base material is aluminium which is extracted from bauxite via alumina refining followed by an electrolysis to produce primary aluminium (see /EAA EPR/). Aluminium supply may also come from recycling of aluminium scrap. However, in this EPD, only primary aluminium has been considered for the aluminium supply. This is a conservative assumption since aluminium recycling generates much less environmental impact than primary production. After electrolysis, the liquid primary aluminium is mixed with small quantities of alloying elements such as silicon, iron, magnesium and zinc. The etalbond -light® composite panels are composed of aluminium sheet made of EN AW 3105 or 4116. The alloy composition is provided in the previous table. The alloying elements are not considered in the LCA model and are substituted by primary aluminium. This proxy appears as reasonable considering that alloying elements contribute to less than 5% of the weight of the aluminium sheet.

The liquid alloy is then casted into slabs, i.e. starting material for the sheet production process. The slabs are produced by DC (Direct Chill) casting in cast house.

Aluminium sheets are produced through the rolling process. The slabs are hot rolled at temperature around 400-500°C and then cold rolled. Typical thickness of aluminium layer is 0,3 mm. The aluminium sheet is delivered as an uncoated coil to the coil coating process.

The two above processes constitute the background processes as described in the flow diagram below. The average LCI datasets reported in EAA EPR have been used.

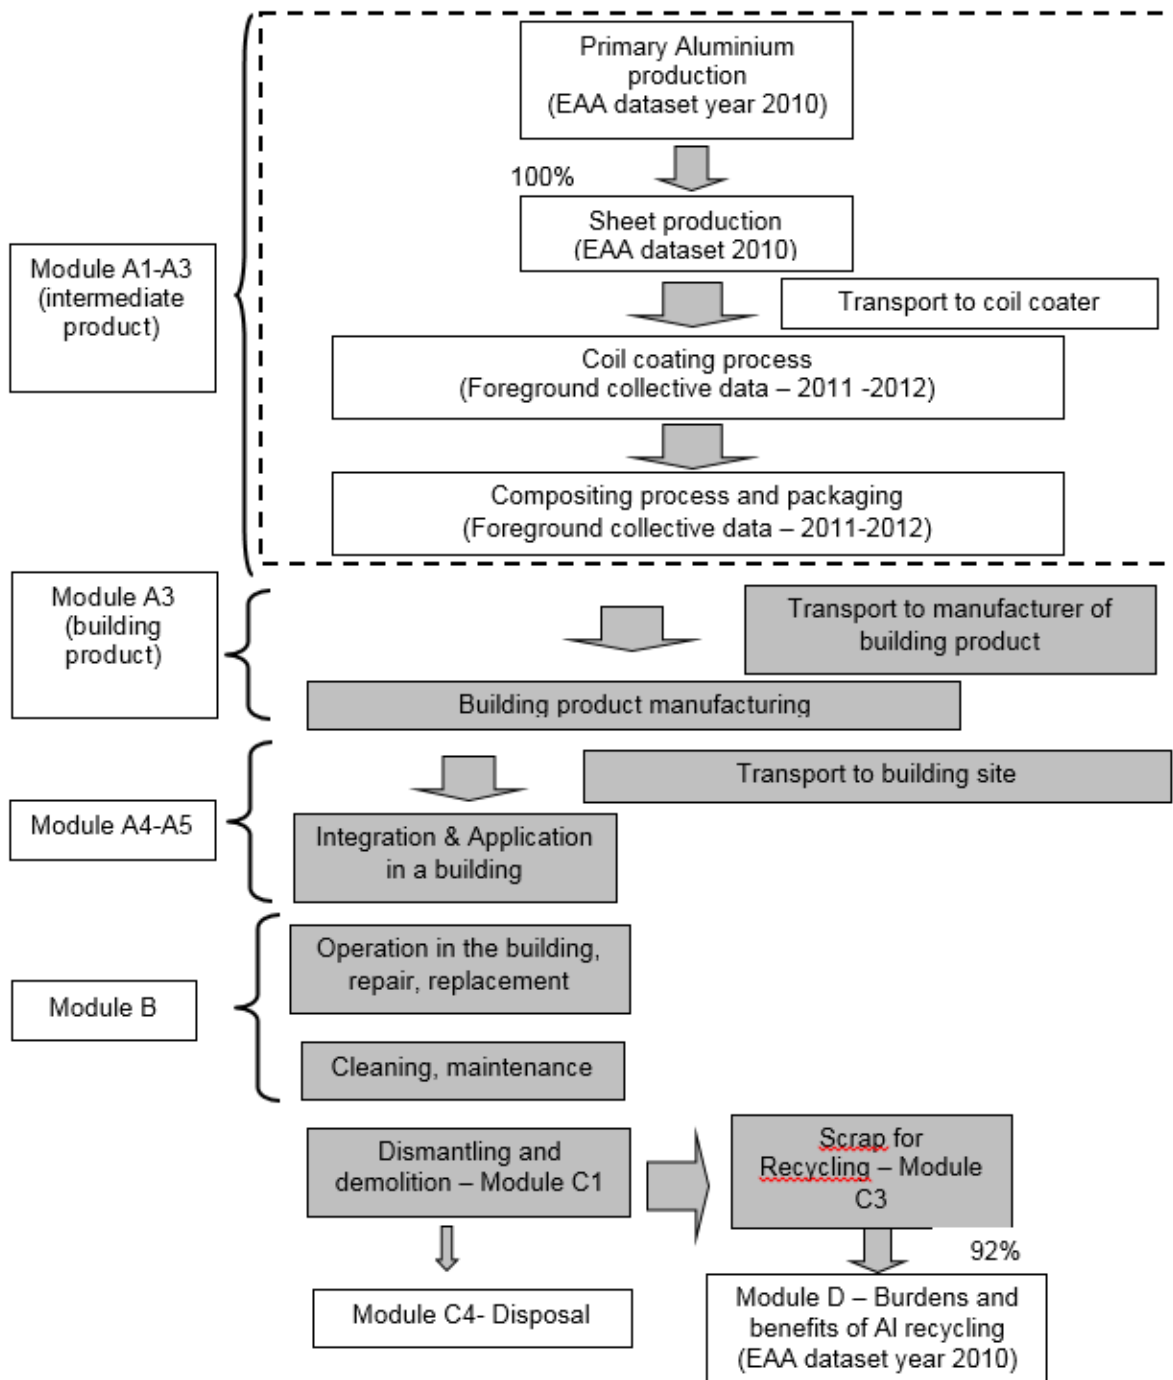


Figure 1. Life cycle flow diagram of the coil coated sheet, processes and life cycle stages (life cycle stages not covered in grey boxes)

2.6. Coil coating and compositing (foreground processes)

ELVAL COLOUR uses its own Coating Line with an aluminium coil as a starting material. The production of the aluminium coil has been modelled using the average datasets published by the European Aluminium as described in the Environmental profile report /EAA EPR/. This proxy appears

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

as reasonable considering the material supply to ELVAL COLOUR which comes mainly from European producers.

Before applying the coil coating, the aluminium sheet is pre-treated through cleaning, etching and chemical conversion. The chemical conversion used by the Coating Line is based on Cr6+ compounds pre-treatment. The coating involves application of organic coating materials to the sheets with a typical thickness of 22 µm.

The coil is positioned at the beginning of the line, and then unwound at a constant speed, passing through the various pre-treatment and successive painting & backing processes before being recoiled. Two strip accumulators found at the beginning and the end of the line enable the work to be continuous. The coil coating process constitutes the first foreground process for which collective LCI datasets have been used from the Coating Line.

Aluminium composite panels are produced with various core thicknesses in a continuous lamination process where the aluminium sheet and the core materials are bonded together through the combination of heat and pressure.

The thickness of composite panels is usually 2, 3, 4 or 6 mm, 3 mm being the most common thickness. The thickness of the aluminium sheet is 0,3 mm for etalbond light®. etalbond light® composite panels are delivered as pallets with dimensions comprised between 1 and 2 m wide up to 8 m long. Etalbond light® panels are placed on wood pallets in stacks with a PE protective film (30-50 µm) on the panels. In this EPD, only the PE film is considered as packaging material.

The aluminium composite panel production process constitutes the second foreground process for which collective LCI datasets have been used, including ELVAL COLOUR production site.

2.7. Health and safety aspects during production and installation

The coating process requires the use of organic solvents as well as hazardous substance for the chemical conversion (i.e. Cr6+ solution).

The [Cr (VI)] containing solution used for the formation of the chemical conversion coating has a very low consumption rate. This chemical conversion coating significantly improves the corrosion resistance and the adhesion of the paint on the aluminium substrate. The chemical conversion process is automated and takes place in well controlled and confined area so that there is no spoilage of Cr (VI) solution or contact with workers.

Waste solution and VOC are systematically collected and properly treated according to the respective European Norms. VOC are directly incinerated within the coating backing furnace at the plant location. No measures exceeding statutory requirements are necessitated.

There are no relevant aspects of occupational health and safety during the further processing and installation of the etalbond®-Light panels. Under normal installation, no measurable environmental impacts can be associated to the chromium presence from Cr-based pre-treated aluminium.

2.8. Packaging

The material is supplied as stacked composite panels in the dimensions specified by the customer. Wooden pallets, plastic foil and roll cores made of steel, plastic or paper are used as packaging materials. After use, packaging materials can be re-used or recycled. Wooden pallets, plastic and paper can be collected separately and directed to the recycling circuit.

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

2.9. Further processing, use and reference service life

Etalbond®-light panels are intermediate products which are used for the production of cladding panels used in the building sector. This EPD does not cover the downstream processes to convert this intermediate product into a final building product.

During the chemical conversion process, the Cr6+ ions reacts entirely with the aluminium substrates to generate a stable chromium oxide layer. Hence, even in case of damage of the organic coating, there is no measurable release of chromium during the use phase.

Since the use phase is not modelled, no specific information can be given about the reference Service Life. Main uses are corporate identity projects, signage, decorative applications etc. In practice, a service life of 50 years can be assumed in normal use for such application /DURABILITY/. In normal use, aluminium building products are not altered or corroded over time. A regular cleaning (e.g. once a year) of the product suffices to secure a long service life. However, the use of cleaning solution too alkaline (pH >10) or too acid (pH < 4) should be avoided.

In case of fire, etalbond®-light is classified in accordance to: BS 476 part 6, part 7 and combines as class 0, DIN 4102 as Class B2 and NF P 92-501 as M1.

2.10. End of life stage

etalbond®-light is fully recyclable. The etalbond®-light panels should be specifically collected in special containers or locations and directed to specialised recyclers. The economic value of etalbond®-light panels at end of life should largely cover the possible costs related to those operations.

Hence, after use, the product is in most cases collected and directed to a specialised company for aluminium and plastic recycling. Recycled aluminium and plastic produced by these recyclers is used again as primary material. A survey by the European Aluminium Association has established an average collection rate of 96% for aluminium applications in the construction sector /EAA DELFT/.

Only a small fraction of the aluminium coated sheet escapes the recycling route. This small fraction (4%) is then considered as landfilled in the LCA model.

From collected scrap up to the new aluminium ingot, it is assumed that 4% of the metal is lost. Hence, the overall recycling rate of aluminium has been fixed to 92%.

The waste code for aluminium in accordance with the European Waste Catalogue (EWC) is 17 04 02 and for plastic is 17 02 03.

2. LCA: Calculation rules

3.1. Functional Unit and specific mass

The functional unit corresponds to 1 m² of aluminium composite panel. The corresponding mass of the composite panels are reported in the next table

etalbond light® thickness	Mass of the functional unit
2 mm	2,9 kg
3 mm	3,8 kg
4 mm	4,8 kg
6 mm	6,6 kg

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

3.2. System boundaries

Type of EPD: Cradle to gate – with options

Production stage (modules A1-A3) includes processes that provide materials and energy input for the system, manufacturing and transport processes up to the factory gate, as well as waste processing.

For the end of life a collection rate of 96% is assumed and directed to recycling (module D). The 4% lost product is modelled through landfilling (module C4). Considering the few losses along the recycling chain, it is assumed that 92% of the Al sheet is effectively recycled as new ingot. Hence, an end of life recycling rate of 92% is used within module D to reflect the benefits of recycling through the substitution principle.

According to the PCR document, modules C1, C2 and C3 shall be addressed in the EPD. Since aluminium products covered in these EPDs are intermediates building products for which it is difficult to define deconstruction and transport scenarios, it has been decided not to cover these three modules. For building products made of aluminium sheet, the contribution of these modules are usually moderate and their omission can be considered as reasonable.

3.3. Estimates and assumptions

It has been assumed that the aluminium composite panels was composed of primary aluminium and virgin polyethylene only. In practice, aluminium or polyethylene sourcing is also based on recycled aluminium or recycled polyethylene. This assumption is then conservative. Alloying elements were not considered and a pure aluminium sheet has been assumed as a proxy.

3.4. Cut-off criteria

All known operating data was taken into consideration in the analysis. Considering the long experience of data collection within the European Aluminium Industry, it can be assumed that the ignored processes or flows contribute to much less than 5% to the impact categories under review.

3.5. Background data

GaBi 6 2014- the software system for comprehensive analysis developed by thinkstep (previously PE International) – was used for modelling the life cycle for the manufacture of coil-coated aluminium sheet. Generic GaBi 6 data sets have been used for energy, transport and consumables. For the aluminium primary production, recycling and sheet production, the datasets described in the EAA environmental report have been used /EAA EPR/.

3.6. Foreground data and EPD-data tool

Foreground data refers to the coil coating process. The coil coating data are collective data generated from 6 European plants from 4 companies, including ELVAL COLOUR. Data are from the year 2011 and 2012. The collective data have been used then for developing an EPD-data tool which generates EPD indicators based on several key product specifications. This EPD-data tool has been used to generate the EPD results.

3.7. Data quality

The data quality can be considered as good. The primary data collection has been done thoroughly, all relevant flows are considered. Technological geographical and temporal representativeness is appropriate. The use of collective data can be considered as a reasonable proxy of the ELVAL COLOUR processes.

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

3.8. Allocation

Any aluminium scrap produced at sheet production or coil coating process level is recycled by the producer or sent to recycling to a recycler. This recycling loop has been modelled in the GaBi model so that the coil coated sheet is the only product exiting the gate. Hence, the production process does not deliver any co-products.

For the end-of-life stage, sheet scrap is sent to a recycling treatment (melting process) and credits are calculated. Both the recycling and the credits are modelled in module D.

3.9. Comparability

As a general rule, a comparison or evaluation of EPD data is only possible when all of the data to be compared has been drawn up in accordance with EN 15804 and the building context or product-specific characteristics are taken into consideration.

3. LCA scenarios and additional technical information

Modules A4, A5, B1-B7 and C1-C3 are not taken into consideration in this Declaration. Only primary aluminium is used as sourcing. Hence, end of life credits are fully reported in Module D based on a recycling rate of 92% and a full conservation of the inherent properties through recycling.

Production			Installation		Use stage							End-of-Life				Next product system	
Raw material supply (extraction, processing, recycled material)	Transport to manufacturer	Manufacturing	Transport to building site	Installation into building	Use / application	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport to EoL	Waste processing for reuse, recovery or recycling	Disposal	Reuse, recovery or recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X

4. LCA results

The results for the etalbond light® composite panels are reported in the next table

- 2 mm: etalbond- light– 20
- 3 mm: etalbond- light– 30
- 4 mm: etalbond- light– 40
- 6 mm: etalbond- light– 60

Parameter	Unit	Etalbond - light - 20			Etalbond - light - 30			Etalbond - light - 40			Etalbond - light - 60			
		A1-A3	C4	D	A1-A3	C4	D	A1-A3	C4	D	A1-A3	C4	D	
		kgalu sheet	1,6			1,6			1,6			1,6		
		kg PE	1,3			2,2			3,2			5,0		
kg total	2,9			3,8			4,8			6,6				
GWP	[kg CO ₂ -eq.]	20,7	1,57E-03	-12,6	22,3	2,07E-03	-12,6	23,9	2,57E-03	-12,6	27,1	3,56E-03	-12,6	
ODP	[kg CFC11-eq.]	7,96E-07	2,60E-14	-6,91E-07	7,96E-07	3,43E-14	-6,91E-07	7,96E-07	4,25E-14	-6,91E-07	7,96E-07	5,89E-14	-6,91E-07	
AP	[kg SO ₂ -eq.]	0,0765	0,00000974	-0,0505	0,0804	0,0000128	-0,0505	0,0843	0,0000159	-0,0505	0,0921	0,0000221	-0,0505	
EP	[kg PO ₄ ³⁻ -eq.]	4,80E-03	1,40E-06	-2,92E-03	5,09E-03	1,85E-06	-2,92E-03	5,38E-03	2,29E-06	-2,92E-03	5,96E-03	3,18E-06	-2,92E-03	
POCP	[kg ethene-eq.]	6,06E-03	9,45E-07	-3,12E-03	0,00685	1,24E-06	-0,00312	0,00764	1,54E-06	-0,00312	0,00922	2,14E-06	-0,00312	
ADPE	[kg Sb-eq.]	1,02E-05	5,60E-10	-5,52E-06	1,07E-05	7,37E-10	-5,52E-06	1,12E-05	9,14E-10	-5,52E-06	1,22E-05	1,27E-09	-5,52E-06	
ADPF	[MJ]	311	0,0206	-132	381	0,0271	-132	450	0,0336	-132	588	0,0467	-132	
PERE	[MJ]	70,8	-	-	71,7	-	-	72,5	-	-	74,2	-	-	
PERM	[MJ]	0,0	-	-	0,0	-	-	0,0	-	-	0,0	-	-	
PERT	[MJ]	70,8	2,06E-03	-57,6	71,7	2,71E-03	-57,6	72,5	3,36E-03	-57,6	74,2	4,67E-03	-57,6	
PENRE	[MJ]	374,0	-	-	445,0	-	-	515,0	-	-	655,0	-	-	
PENRM	[MJ]	0,0	-	-	0,0	-	-	0,0	-	-	0,0	-	-	
PENRT	[MJ]	374,0	2,14E-02	-176,0	445,0	2,82E-02	-176,0	515,0	3,50E-02	-176,0	655,0	4,85E-02	-176,0	
SM	[kg]	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	
RSF	[MJ]	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	
NRSF	[MJ]	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	
FW	[m ³]	0,16	3,97E-06	-0,12	0,16	5,22E-06	-0,12	0,17	6,48E-06	-0,12	0,18	8,99E-06	-0,12	
HWD	[kg]	0,00377	1,06E-08	0	0,00337	8,94E-09	0	0,00455	1,11E-08	0	0,0069	1,54E-08	0	
NHWD	[kg]	6,13	2,56E-04	-4,87	3,82	2,16E-04	-2,88	3,91	2,68E-04	-2,84	4,08	3,71E-04	-2,77	
RWD	[kg]	0,0406	5,12E-07	-0,0302	0,0263	4,32E-07	-0,0181	0,0267	5,35E-07	-0,0181	0,0276	7,43E-07	-0,0181	
CRU	[kg]	0	0	-	0	0	-	0	0	-	0	0	-	
MFR	[kg]	0	0	2,4	0	0	1,44	0	0	1,44	0	0	1,44	
MER	[kg]	0	0	-	0	0	-	0	0	-	0	0	-	
EEE	[MJ]	0	0	-	0	0	-	0	0	-	0	0	-	
EET	[MJ]	0	0	-	0	0	-	0	0	-	0	0	-	

Table 1 LCIA results for 1 m² of etalbond®-light composite panel (Table 5-11 in LCA report)

List of abbreviations: GWP: Global warming potential; ODP: Ozone layer depletion potential; AP: Acidification potential of land and water; EP: Eutrophication potential; POCP: Photochemical oxidation potential; ADPE: Abiotic depletion potential (elements); ADPF: Abiotic depletion potential (fossil fuels); PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM: Use of renewable primary energy resources used as raw materials; PERT: Total use of renewable primary energy resources; PENRE: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM: Use of non-renewable primary energy resources used as raw materials; PENRT: Total use of non-renewable primary energy resources; SM: Use of secondary materials; RSF: Use of renewable secondary fuels; NRSF: Use of non-renewable secondary fuels; FW: Use of net fresh water; HWD: Hazardous waste disposed; NHWD: Non-hazardous waste disposed; RWD: Radioactive waste disposed; CRU: Components for re-use; MFR: Materials for recycling; MER: Materials for energy recovery; EEE: Exported electrical energy; EET: Exported thermal energy

5. LCA interpretation

- Production of the aluminium sheet

The majority of the environmental impacts come from the aluminium sheet manufacturing. Within the manufacturing processes, the primary aluminium production is dominant, especially the alumina production and the electrolysis. This is particularly the case in these EPDs since it is assumed that the sheet is composed of 100% primary aluminium produced in Europe. The rolling process which converts ingot, i.e. slab, into sheet is much less significant. The LCA modelling and the impact of the primary aluminium production is detailed in the EAA environmental report /EAA EPR/. The recycled ingot production which presents a much lower impact than the primary ingot production is only used in Module D.

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

- Coil coating process

The coil coating process contributes in general between 2% and 15% to the various indicators. The coating process is also responsible for 100% of the hazardous waste disposed.

- Compositing process and core material

The composite panel production process contributes to about 5%-10% to the overall impact of the composite panel. The core material, i.e. polyethylene, has a light density (0,92) and has a limited environmental impact compared to the aluminium sheet. Hence, the increase of the composite thickness from 2 to 6 mm without changing the Aluminium sheet thickness does not increase significantly the indicator results.

- End of life stage (C4) and Module D

The contribution of Module C4 (disposal) is very limited compared to module A1-A3 and module D. No specific comments are then relevant for this module.

Since no recycling was considered at production level, all the recycling benefits are considered in module D. Calculation rules for module D are explained in the annex C of the EAA PCR document / EAA PCR/. A recycling rate of 92% is used and justified. This provides a significant benefits considering that recycling saves up to 95% of the impact of the primary production. This demonstrates the importance to consider module D into the assessment. The possible energy recovery resulting from the combustion of the core material is not considered in this EPD.

Declaration holder:  <i>Power to imagine</i>	Programme holder:  EUROPEAN ALUMINIUM
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

6. References

CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; CEN/TR 15941:2010
EAA DELFT	COLLECTION OF ALUMINIUM FROM BUILDINGS IN EUROPE - A Study by Delft University of Technology – 2004, available at http://www.european-aluminium.eu/publications-building/
EAA EPR	Environmental Profile Report for the European Aluminium Industry - April 2013- Data for the year 2010, available at http://www.european-aluminium.eu/environmental-profile-report/
EAA PCR	Product Category Rules (PCR) for Aluminium Building Products – version of 30 Jan 2013, available at http://www.european-aluminium.eu/updated-epd-programme-2/
EN 13523-1	Coil coated metals - Test methods - Part 1: Film thickness
EN 13523-2	Coil coated metals - Test methods - Part 2: Gloss
EN 1396	Aluminium and aluminium alloys. Coil coated sheet and strip for general applications. Specifications
EN 13964+A1	Suspended ceilings – Requirements and test methods
EN 15804	EN 15804:2012-04: Sustainability of construction works -Environmental Product Declarations - Core rules for the product category of construction products
EN 485-2	Aluminium and aluminium alloys – Sheet, strip and plate – Part 2: Mechanical properties
EN 485-4	Aluminium and aluminium alloys – Sheet, strip and plate – Part 4: Tolerances on shape and dimensions for cold rolled products
EN 573-3	Aluminium and aluminium alloys – Chemical composition and form of wrought products – Part 3: Chemical composition and form of products
EN ISO 14025	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
EN ISO 14040	Environmental management - Life cycle assessment - Principles and framework
EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines
GABi 6	GaBi 6.3 dataset documentation for the software-system and databases, LBP, University of Stuttgart and PE INTERNATIONAL AG, Leinfelden-Echterdingen, 2013 (http://documentation.gabi-software.com/)
RECYCLING IN EN15804	TACKLING RECYCLING ASPECTS IN EN15804 – paper presented at the « LCA & Construction » conference in Nantes 10-12 July 2012
EAA IR COIL COATING	EAA Internal environmental report on coil coating process – January 2014 (confidential, only provided to the EPD verifier)
EAA IR COMPOSITING	EAA Internal environmental report on compositing process – January 2014 (confidential, only provided to the EPD verifier)
DURABILITY	Aluminium and Durability - Towards Sustainable Cities, edited by Michael Stacey, Published by Cwningen Press, November 2014 ISBN 978-0-9930162-0-2 (available at http://www.world-aluminium.org/publications/)
EN 13501-1	Fire classification of construction products and building elements. Classification using test data from reaction to fire tests
BS 476-6: 1989+A1:2009	Fire tests on building materials and structures. Method of test for fire propagation for products
BS 476-7:1997	Fire tests on building materials and structures. Method of test to determine the classification of the surface spread of flame of products
DIN 4102- Part 1, B2 (1998),	Reaction to fire tests - Ignitability of building products subjected to direct impingement of flame.